




Countersunk serrated lock washer with external teeth

**DIN 6798V**

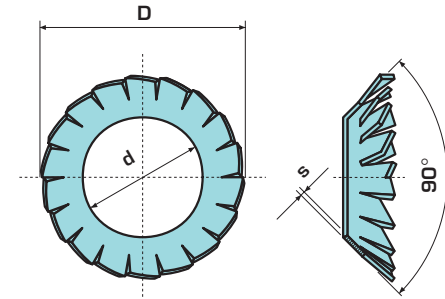

All Dimensions in mm

For Screws mm	Washer Dimensions				A	B	Weight (kg/1000PCS) ≈
	d H13	D ≈	s				
3	3,2	6	0,2	± 0,015	12	2.500	0,051
3,5	3,7	7	0,25		12	2.500	0,074
4	4,3	8	0,25	± 0,020	14	2.500	0,080
5	5,3	9,8	0,3		14	2.500	0,136
6	6,4	11,8	0,4	± 0,025	16	3.000	0,278
8	8,4	15,3	0,4		18	3.000	0,458
10	10,5	19	0,5	± 0,025	20	4.000	0,887
12	13	23	0,5		26	4.000	1,295
14	15	26,2	0,6	± 0,025	28	6.000	2,110
16	17	30,2	0,6		30	6.000	2,728