




Toothed lock washer with external teeth

DIN 6797A

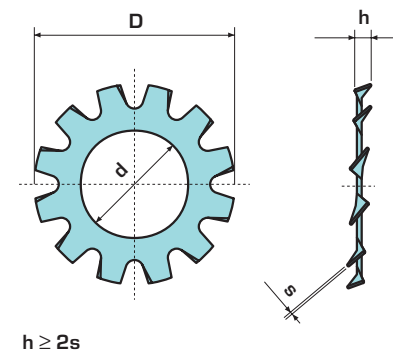

All Dimensions in mm

For Screws mm	Washer Dimensions						A	B	Weight (kg/1000PCS ≈
	d min.	d max.	D max.	D min.	S				
3	3,2	3,38	6	5,7	0,4	± 0,020	6	3.000	0,039
4	4,3	4,48	8	7,64	0,5	± 0,025	8	4.000	0,088
5x10	5,3	5,48	10	9,64	0,6	± 0,030	8	6.000	0,168
6	6,4	6,62	11	10,57	0,7		8	9.000	0,228
8x15	8,4	8,62	15	14,57	0,8		8	13.000	0,523
10	10,5	10,77	18	17,57	0,9		9	18.000	0,800
12	13	13,27	20,5	19,98	1	± 0,035	10	24.000	1,021
14	15	15,27	24	23,48	1		10	24.000	1,469
16	17	17,27	26	25,48	1,2		12	31.000	1,921
18	19	19,33	30	29,48	1,4		12	39.000	3,034
20	21	21,33	33	32,38	1,4	± 0,045	12	39.000	3,750
22	23	23,33	36	35,38	1,5	± 0,045	14	49.000	4,776
24	25	25,33	38	37,38	1,5		14	49.000	5,085
27	28	28,33	44	43,38	1,6		14	60.000	7,687
30	31	31,39	48	47,38	1,6		14	60.000	9,050