




Toothed lock washer with internal teeth

DIN 6797 J

All Dimensions in mm

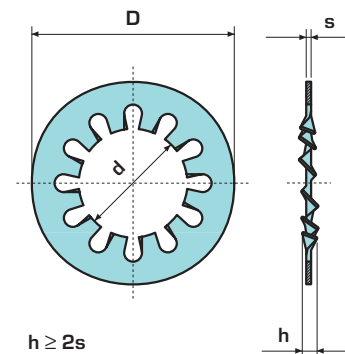

For Screws mm	Washer Dimensions						A	B	Weight (kg/1000PCS) ≈
	d min.	d max.	D max.	D min.	S				
3	3,2	3,38	6	5,7	0,4	± 0,020	6	3.000	0,039
4	4,3	4,48	8	7,64	0,5	± 0,025	8	4.000	0,093
5x10	5,3	5,48	10	9,64	0,6		8	6.000	0,183
6	6,4	6,62	11	10,57	0,7	± 0,030	8	9.000	0,238
8x15	8,4	8,62	15	14,57	0,8		8	13.000	0,525
10	10,5	10,77	18	17,57	0,9		9	18.000	0,832
12	13	13,27	20,5	19,98	1		10	24.000	1,060
14	15	15,27	24	23,48	1	± 0,035	10	24.000	1,488
16	17	17,27	26	25,48	1,2		12	31.000	2,031
18	19	19,33	30	29,48	1,4		12	39.000	3,250
20	21	21,33	33	32,38	1,4		12	39.000	3,748
22	23	23,33	36	35,38	1,5	± 0,045	14	49.000	4,970
24	25	25,33	38	37,38	1,5		14	49.000	5,244
27	28	28,33	44	43,38	1,6		14	60.000	8,084
30	31	31,39	48	47,38	1,6		14	60.000	9,405